


# Twin Bail Beam

- The Twin Bail Beam is an ideal solution for utilizing two hoists to increase load capacity. A roller bearing swivel hook allows the load to be rotated at the processing location and pivots to prevent binding if one hoist is raised or lowered more rapidly than the other.

- Box design adds strength to the beam laterally in case of sideward movement caused by shifting of the load.

- All lifters are proof tested to meet or exceed ANSI/ASME B30.20 standards and test certificate issued. Painted safely yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

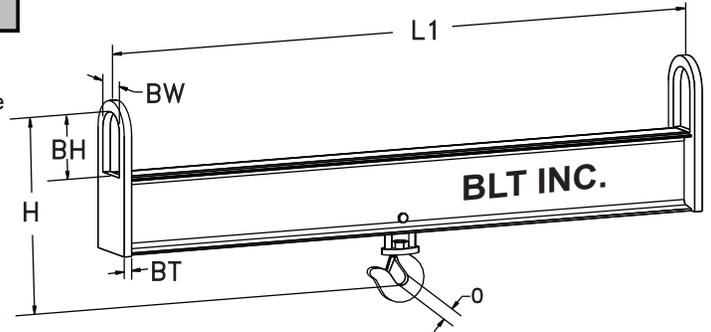

Model Number	Pounds Capacity (See Note #1)	Inches (See Note #6)					Pounds Approx. Lifter Weight	
		Length L1	Total Height H	Ball Size (See Note #2 & #3)				Max Stock Diameter (See Note #4 & #5) O
				BT	BW	BH		
BLT0472-TBB	4000	72	21-1/2	(3/4 x 3/4) X 2 X 4			1-11/32	
BLT0496-TBB		96	22-1/2					
BLT04120-TBB		120	23-1/2					
BLT0672-TBB	6000	72	21-1/2	(3/4 x 1) X 2 X 4			1-11/32	
BLT0696-TBB		96	22-1/2					
BLT06120-TBB		120	23-1/2					
BLT0860-TBB	8000	60	25	(3/4 x 1) X 2 X 4			1-11/16	
BLT0896-TBB		96	26					
BLT08120-TBB		120	26					
BLT08144-TBB		144	29					
BLT1096-TBB	10000	96	31	(3/4 X 1) X 2 X 6			1-11/16	
BLT10120-TBB		120	31					
BLT10180-TBB		180	31					
BLT10240-TBB		240	34					
BLT1596-TBB	15000	96	34-1/4	(1X1-1/4) X 3 X 6			2-1/16	
BLT15120-TBB		120	34-1/4					
BLT15180-TBB		180	37-1/4					
BLT15240-TBB		240	40-1/4					
BLT2096-TBB	20000	96	44-1/4	(1-1/4X1-1/2) X 4 X 10			2-1/4	
BLT20120-TBB		120	44-1/4					
BLT20180-TBB		180	47-1/4					
BLT20240-TBB		240	44-1/4					
BLT40120-TBB	40000	120	53-1/4	(1-1/2 x 1-3/4) x 4 x 10			3-5/8	
BLT40180-TBB		180	53-1/4					
BLT40240-TBB		240	53-1/4					
BLT60120-TBB	60000	120	59-1/2	(2 x 2-1/4) X 6 X 14			3-3/4	
BLT60180-TBB		180	59-1/2					
BLT60240-TBB		240	59-1/2					

- NOTES:
- Other capacities and lengths available upon request.
  - All loads must be centered under the swivel hook.
  - Please verify that crane hook will fit the lifting bail size.
  - Maximum stock diameter refers to the size of the material that will fit into the swivel hook opening.
  - Can be supplied with roller bearing swivel hook or standard swivel hook.
  - Above dimensions and weights are approximate and may vary based on design.

Copyright 2007