


Fixed Hook Beam

- The Fixed Hook Lifting Beam is an ideal solution for lifting loads where headroom is critical.
- Box design adds strength to the beam laterally in case of sideward movement caused by shifting of the load.
- All lifters are proof tested to meet or exceed ANSI/ASME B30.20 Standards and test certificate issued. Painted safety yellow and clearly marked on both sides with rated capacity to conform to OSHA standards.

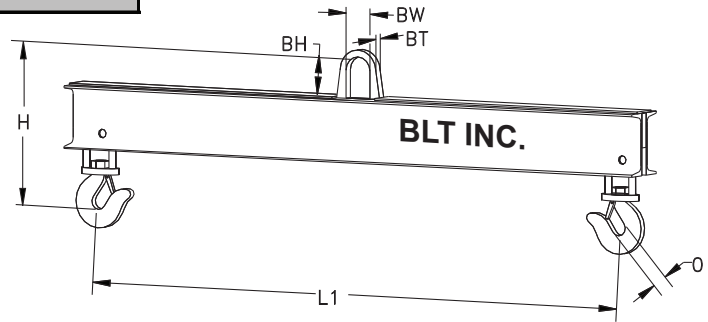

Model Number	Pounds	Inches (See Note #5)					Pounds	
	Capacity (See Note #1)	Length L1	Total Height H	Ball Size (See Note #2 & #3)			Max Stock Diameter (See Note #4) O	Approx. Lifter Weight
				BT	BW	BH		
BLT0136-FHB	1000	36	11-1/4	3/4	X 2	X 4	7/8	38
BLT0160-FHB		60	11-1/4					60
BLT0172-FHB		72	11-1/4					71
BLT0196-FHB		96	11-1/4					92
BLT0260-FHB	2000	60	11-1/4	3/4	X 2	X 4	7/8	60
BLT0272-FHB		72	11-1/4					71
BLT0296-FHB		96	12-1/4					113
BLT02120-FHB		120	12-1/4					138
BLT0448-FHB	4000	48	11-1/4	1	X 2	X 4	7/8	56
BLT0472-FHB		72	12-1/4					96
BLT0496-FHB		96	13-1/4					145
BLT04120-FHB		120	13-1/4					193
BLT0648-FHB	6000	48	14-3/4	(3/4	X 1)	X 2	X 6	72
BLT0672-FHB		72	15-3/4					118
BLT0696-FHB		96	16-3/4					178
BLT06120-FHB		120	17-3/4					242
BLT0860-FHB	8000	60	17-1/4	(1X1-1/4)	X 3	X 6	1-1/16	125
BLT0896-FHB		96	18-1/4					214
BLT08120-FHB		120	18-1/4				285	
BLT08144-FHB		144	20				385	
BLT1096-FHB	10000	96	24	(1-1/4X1-1/2)	X 4	X 10	1-5/16	275
BLT10120-FHB		120	24					344
BLT10180-FHB		180	26				736	
BLT10240-FHB		240	29-3/4				1010	
BLT1596-FHB	15000	96	24-3/4	(1-1/2X1-1/2)	X 4	X 10	1-5/16	339
BLT15120-FHB		120	25-3/4					438
BLT15180-FHB		180	29-3/4				806	
BLT15240-FHB		240	32-3/4				1569	
BLT2096-FHB	20000	96	27-3/4	(1-1/2X1-3/4)	X 4	X 10	1-9/16	392
BLT20120-FHB		120	29-3/4					562
BLT20180-FHB		180	32-3/4				1212	
BLT20240-FHB		240	32-3/4				1625	
BLT40120-FHB	40000	120	37-3/4	(2 X 2-3/4)	X 6	X 14	2-1/16	987
BLT40180-FHB		180	40-3/4					1675
BLT40240-FHB		240	40-3/4				2302	
BLT60120-FHB		60000	120				49-1/4	(2-1/2 X 3)
BLT60180-FHB	180		49-1/4	2449				
BLT60240-FHB	240		49-1/4	3462				

- NOTES:
1. Other capacities and lengths available upon request.
 2. All loads must be centered under the lifting ball.
 3. Please verify that the crane hook will fit lifting ball size.
 4. Maximum stock diameter refers to the size of the material that will fit into the swivel hook opening.
 5. Above dimensions and weights are approximate and may vary based on design.

Copyright 2007